

Pvc Coated Fiberglass Measuring Tapes

"MILLION TAPES" ARE MANUFACTURED TO WITHSTAND RUGGED USE AND RESIST TEAR, YEAR AFTER YEAR, EVEN UNDER ROUGH HANDLING AND EXTREME WEATHER CONDITIONS AND TEMPERATURES.

- SUPERIOR DURABILITY ■ HIGH ACCURACY ■ HIGH VISIBILITY
- NON-CONDUCTIVE ■ GOOD DESIGNED REEL/CASE
- WEATHER RESISTANT ■ EASY TO CLEAN



FEATURES:

- **STRENGTH** is assured through an inner core of extreme tough Glass Fiber and an overlay of protective Poly Vinyl Chloride. The tape breaking point is more than 2,000 N.
- **ACCURACY** is almost comparable with that of conventional steel measuring tapes. The tolerance on MILLION TAPE : within ± 5 mm in 30 meters long.
- **LEGIBILITY** is excellent as all marking are printed with ultraviolet-fixation permeating ink. Thereby, the markings are hardly come off for years of use.
- **NON-CONDUCTIVE** tape blade is made of two non-conductive materials which render the tape absolutely safe from hazards. The tape has a proven dielectric strength of 200,000 V/m.
- **DESIGN**, through long experiences in our own field, makes the MILLION TAPES series a wise choice for you.

MILLION OPEN REEL

PVC coated fiberglass tape in ABS Open Reel.

● Width:12.5mm ● Thick:0.45mm ● Tension:20N

Cat. Nos.	Lengths
OTR30	30m/30m
OTR50	50m/50m
OTR100	100m/100m

DUAL MARKINGS

MARKING SPECIFICATIONS

Type of graduation	Descriptions	Graduations
2/EC5	Metric/Metric on both sides	Front Reverse

Pvc Coated Fiberglass Measuring Tapes



MILLION REEL

PVC coated fiberglass tape in ABS Reel.

●Width:12.5mm ●Thick:0.45mm ●Tension:20N

Cat. No.	Length
MRT30	30m/30m
MRT50	50m/50m



MILLION CUSTOM


PVC coated fiberglass tape in ABS Case.

●Width:12.5mm ●Thick:0.45mm ●Tension:20N

Cat. No.	Length
MCT10	10m/10m
MCT20	20m/20m
MCT30	30m/30m
MCT50	50m/50m

COMMENCEMENT OF MEASURE ...Type of zero...

Type C (YAMAYO Standard Type)

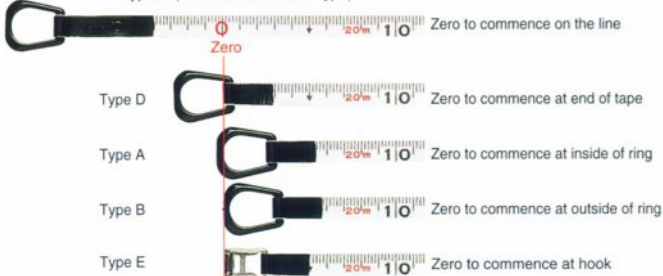


The following EEC standard tape is also available.


Type of graduation : EC2 Metric only on one side(2mm)



FEATURES:




SUPERIOR DURABILITY



NON-CONDUCTIVE



EASY TO CLEAN

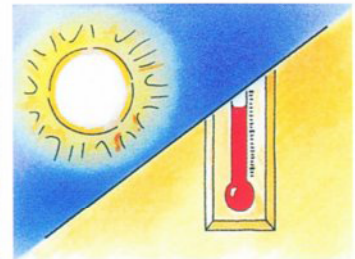

WEATHER RESISTANT

SDM
S.D.M. CO.,LTD.
SDM Co.,Ltd.

1/285 moo 9 Bangphud, Pakkred, Nonthaburi THAILAND 11120 | Tel : 02 582 3509 HOTLINE : 081 514 8151

E-mail : sdmthai@sdm.co.th | website : www.sdm.co.th | Line ID : @sdmthailand

